

# PRODUCT DATASHEET

## Confidex ESD On Metal Label™



Optimized for ESD plastics with excellent performance and durability

### ELECTRICAL SPECIFICATION

#### Device type

UHF RFID / EPCglobal Gen2v2

#### Operational frequency

ETSI 865 – 869 MHz

FCC 902 – 928 MHz

#### IC type

Impinj Monza 4E™

#### Memory configuration

EPC 496 bit; User 128 bit; TID 96 bit

#### EPC memory content

Same EPC by default

#### Read range (2W ERP)\*

On metal up to 9 m / 30 ft

On ESD plastic up to 7m / 23 ft

On Plastic up to 4m / 13 ft

Liquid containers up to 5 m / 16 ft

#### Applicable surface materials\*

All surfaces, optimized for ESD plastics

#### Attachment on curved surface\*

Label can be attached on a curved surface. Check installation instructions for more details.

\* Read ranges are theoretical values that are calculated for non-reflective environment. Different surface materials may have an effect on performance.

### MECHANICAL SPECIFICATION

#### Label surface

White PET with good printability. Resin ribbon recommended for best durability

#### Background adhesive

High tack adhesive with excellent adhesion to all surfaces including ESD plastics

#### Weight

1,5 g

#### Delivery format

300 pcs good labels on reel, bad ones marked with "XXX" printing.

#### Pitch on reel


42,86 mm / 1.67"

#### Reel core inner diameter

76 mm / 3"

#### Tag dimensions

80 x 35 x 1.2 mm / 3.15 x 1.38 x 0.047"

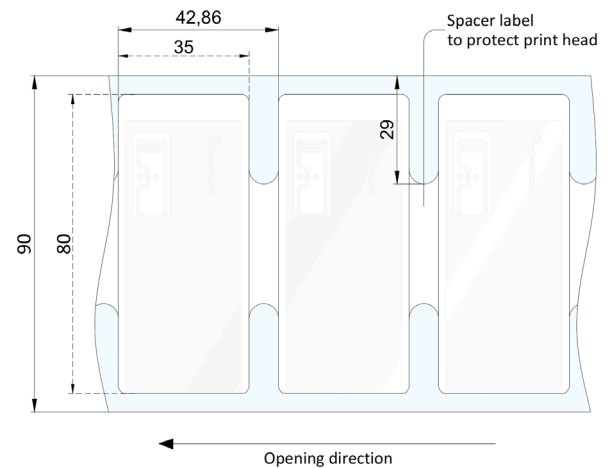

### ENVIRONMENTAL RESISTANCE

#### Operating temperature

-35°C to +85°C / -31°F to +185°F

#### Peak temperature

+110°C / 230°F for 10min

#### Ambient temperature

-35°C to +85°C / -31°F to +185°F

#### Water resistance

IP68, tested for 5 hours in 1m deep water

#### Washing resistance

Tolerates industrial washing with standard solvents. Washing process should be tested in final application. Printing durability can be improved with optional protective film.

#### Chemical resistance

No physical or performance changes in:


- 168h Sulfuric acid (10%, pH 2) exposure
- 168h Motor oil exposure
- 168h Salt water (salinity 10%) exposure
- 30min NaOH (10%, pH 13) exposure

#### Storage condition

1 year in +20°C / 50% RH

*Environmental values are the best recommendations; resistance against different conditions depends on the combination of all influencing factors, exposure duration and chemical concentrations. Thus, product's final suitability for certain environmental conditions is recommended to be tested.*

## INSTALLATION INSTRUCTIONS

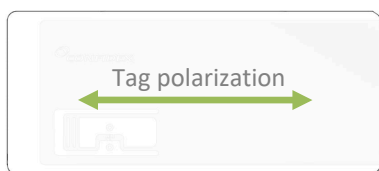


When attaching the label ensure the following

- Select a smooth surface without uneven areas below tag
- Avoid touching the background adhesive and IC location


When mounting the label with its adhesive, clean and dry the surface for obtaining the maximum bond strength. Typical cleaning solvents are heptane or acetone for oily surfaces or isopropyl alcohol for plastics. Do not use household cleaning solvents that contain oils. Carefully read and follow the manufacturer's precautions and directions for use when working with solvents.

Ideal application temperature is from +21°C to +38°C (+70°F to +100°F). Bond strength can be improved with firm application pressure and moderate heating up to +54°C (+130°F). Application at temperatures below 10°C (50°F) is not recommended.

Optimal read range is achieved when label is attached close to the edge of metal asset, like shown in below picture.

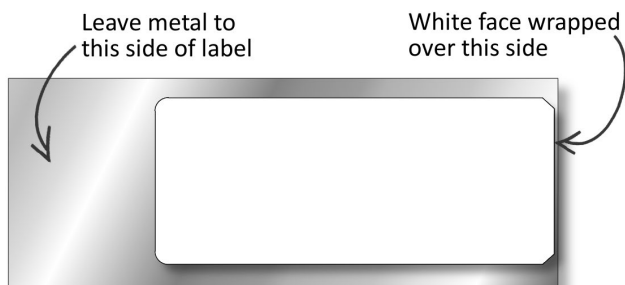

Smallest recommended bending diameter of the Confidex ESD On Metal Label™ is 100mm. For optimal performance please bend the label in the orientation shown below.

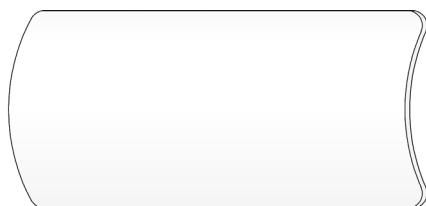

## PRINTER COMPATIBILITY

The Confidex ESD On Metal Label is tested and verified to work with the following printers:

- Zebra ZT411 On Metal
- Zebra ZT410 Silverline
- Sato CL4NX
- Printronix T6000e
- Printronix T4000
- Printronix T800

## PERSONALIZATION OPTIONS

### Pre-encoding

- Customer specific encoding of EPC or user memory. Locking permanently or with password.

### Customized printing

- Customer specific layout including logo, text, numbers, barcodes etc.

### Over-lamination

- Pre-printed labels may be protected with optional protective PET film on top of the label.

## ORDER INFORMATION

**Product number:** 3003354

**Product name:** Confidex ESD On Metal Label™ 80x35mm M4E ETSI

**Product number:** 3003359

**Product name:** Confidex ESD On Metal Label™ 80x35mm M4E FCC

**Protective over-lamination:** Reach out to Confidex for item details.

For additional information and technical support, please contact Confidex Ltd.

### DISCLAIMER

THE MATERIALS, PRODUCTS AND SERVICES ARE SOLD SUBJECT TO ITS STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, CONFIDEX MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN CONFIDEX STANDARD CONDITIONS OF SALE, CONFIDEX AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user bears full responsibility for making its own determination as to the suitability of Confidex products, materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished systems incorporating Confidex products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Confidex.

