



EOS-402 U9 Zero™ Max

T A G E O S

Datasheet

Optimum Performance and Sustainability for Retail Applications



T A G E O S

The EOS-402 U9 Zero Max inlay combines state-of-the-art sustainability with best-in-class global performance in a wide array of retail and supply chain management applications, including those involving boxed merchandise in distribution centers.

Plastic-free and based on FSC® certified paper, EOS-402 U9 Zero Max offers superior bulk reading characteristics in high-density, close proximity environments and complies with numerous retail-relevant ARC specifications such as F, G, H, I, J, K, L, N, O, Q, R, Y, B1, W1 - W6, emphasizing its applicational versatility. It complies with global frequency standards and is available in dry and paper-face delivery formats.

The inlay uses NXP's UCODE 9 IC which is well suited for inventory management applications and enables long read distance and fast inventory of

dense RFID tag populations. The chip also features 96-bit EPC; kill password; EPC and kill password permalock; self-adjusting impedance; and memory integrity safeguards.

Tageos was one of the first companies to qualify for ARC Quality Certification for its manufacturing operations from Auburn University RFID Lab.

Like all Tageos' RFID products, EOS-402 U9 Zero Max complies with ISO 9001:2015 Quality Management System and ISO 14001:2015 Environmental Management System as well as Environmental Directives RoHS and REACH, utilizing sustainable materials such as FSC® certified paper whenever possible.

Overview

IC:	NXP UCODE 9
EPC/User Memory:	96 bit / - bit
TID Memory:	96 bit incl. 48 bit unique S/N
Frequency Band:	860 - 960 MHz
Protocol:	EPC Class 1 Gen 2 - ISO 18000-6c

Application Areas

- Apparel
- Inventory Visibility
- Item Level Tagging
- Supply Chain Management






EOS-402 U9 Zero™ Max

TAGEOS

Technical Overview

	Dry	Paper-face
Product Code	4000000125	4000000126
Antenna Size	70 x 14.5 mm 2.76 x 0.57 in	70 x 14.5 mm 2.76 x 0.57 in
Finish Size	- -	73 x 17 mm 2.87 x 0.67 in
Web Width	76.0 ± 1 mm 2.992 ± 0.04 in	76.0 ± 1 mm 2.992 ± 0.04 in
Pitch	20.00 ± 0.2 mm 0.788 ± 0.01 in	20.00 ± 1 mm 0.788 ± 0.04 in
Antenna Material	Aluminium	Aluminium
Front Face	-	Paper TT
Inlay Substrate	Paper	Paper
Inlay Adhesive	-	Permanent
Liner	-	Paper
Operating Temperature	-20°C / +50°C -4°F / +122°F	-20°C / +50°C -4°F / +122°F
Final Inspection	100% tested	100% tested
ARC Approvals	F, G, H, I, J, K, L, N, O, Q, R, Y, B1, W1, W2, W3, W4, W5, W6	F, G, H, I, J, K, L, N, O, Q, R, Y, B1, W1, W2, W3, W4, W5, W6

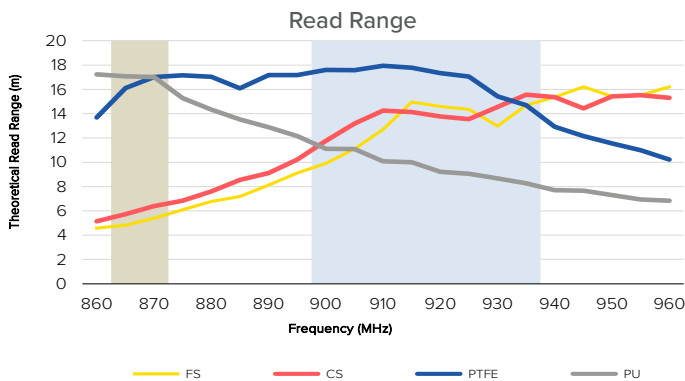

Contact:

Tageos SAS (HQ) . 1340 rue de Pinville . 34000 Montpellier . France . sales@tageos.com



Graphs: All the graphs are indicative: performance in real life applications may vary. The data has been determined based on calculations for transmitters with a normal output power level and respective IC silicon. **Storage & handling precautions:** Observe standard storage and handling practices to minimize Electro Static Discharge. Tageos reserves the right to change its products and services at any time without notice. As our products are used in circumstances beyond our control, we cannot be held liable for any damages caused through their use. This is a general purpose product not designed or intended for any specific application.

© 2023 Tageos All rights reserved. The pictures and illustrations found on this document are for illustration purposes only, and do not necessarily represent the exact products. Tageos is a registered trademark. All other trademarks are the property of their respective owners. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use.




EOS-402 U9
Zero™ Max

TAGEOS

Product Specifications

Mechanical Dimensions

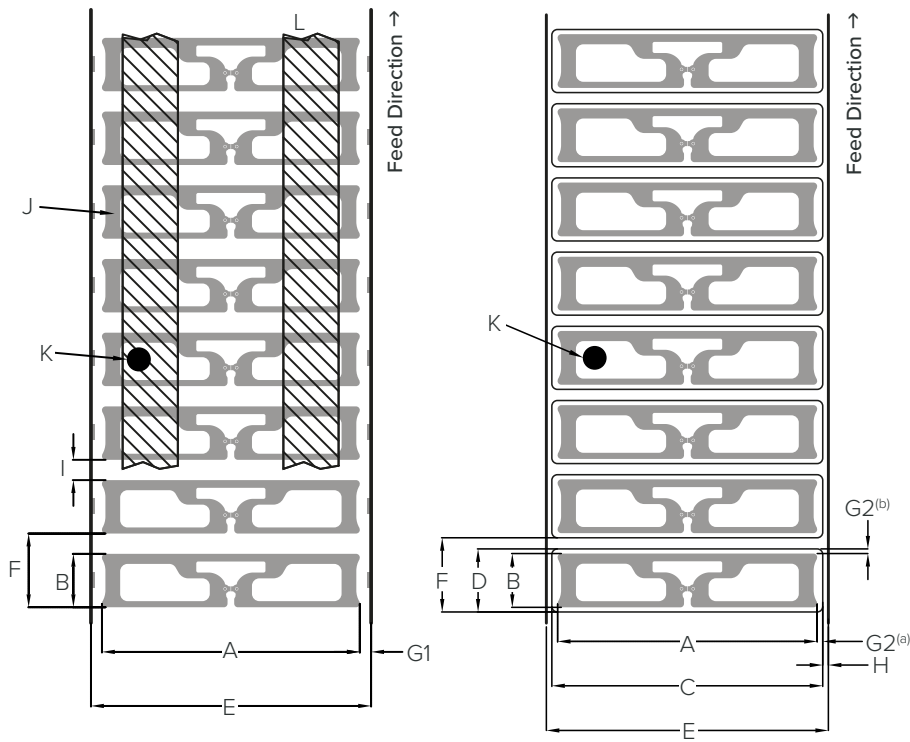

	Dry	Paper-face
Product Code	4000000125	4000000126
Antenna Size	A x B 70 x 14.5 mm / 2.76 x 0.57 in	70 x 14.5 mm / 2.76 x 0.57 in
Finish Size	C x D -	73 x 17 mm / 2.87 x 0.67 in
Web Width	E 76.0 ± 1 mm / 2.992 ± 0.04 in	76.0 ± 1 mm / 2.992 ± 0.04 in
Pitch	F 20.00 ± 0.2 mm / 0.788 ± 0.01 in	20.00 ± 1 mm / 0.788 ± 0.04 in
Antenna to Web Edge	G1 3.1 ± 1 mm / 0.122 ± 0.04 in	-
Antenna to Die-cut	G2 -	1.5 ± 1 mm / 0.059 ± 0.04 in ^(a) 1.25 ± 1 mm / 0.049 ± 0.04 in ^(b)
Die-cut to Web Edge	H -	1.5 ± 1 mm / 0.059 ± 0.04 in
Antenna Gap	I 5.50 mm / 0.217 in	-
Converting Spot	J 14.50 x 4.00 mm / 0.571 x 0.157 in, antenna section can be used	
Bad Mark	K Ø 6.0 mm / 0.236 in	Ø 6.0 mm / 0.236 in
Interleaves	L Yes	No



EOS-402 U9 Zero™ Max

TAGEOS

Packing Details

	Dry	Paper-face
Product Code	4000000125	4000000126
Delivery Format	Roll (single row)	Roll (single row)
Core Inner Diameter	76 mm / 2.99 in	76 mm / 2.99 in
Roll Outer Diameter	309 mm / 12.17 in	206 mm / 8.11 in
Unwinding Direction	Inlay on outside of roll	Inlay on outside of roll
Standard Roll Size	30 000	6 000
Min. Guar. Yield/Roll	98.5%	98.5%
Box Dimensions	39.5 x 39.0 x 17.0 cm / 15.56 x 15.35 x 6.69 in	26.0 x 26.0 x 37.0 cm / 10.24 x 10.24 x 14.57 in
Roll/Box	1	4
Inlays/Box	30 000	24 000
Box Gross Weight	6.47 kg / 14.26 lbs	9.30 kg / 20.50 lbs
Pallet Dimensions	120 x 80 x 151 cm / 47.2 x 31.5 x 59.4 in	120 x 80 x 126 cm / 47.2 x 31.5 x 49.6 in
Boxes/Pallet	48	36
Inlays/Pallet	1 440 000	864 000
Pallet Gross Weight	336 kg / 741 lbs	360 kg / 794 lbs

Contact:

Tageos SAS (HQ) . 1340 rue de Pinville . 34000 Montpellier . France . sales@tageos.com



© 2023 Tageos All rights reserved. The pictures and illustrations found on this document are for illustration purposes only, and do not necessarily represent the exact products. Tageos is a registered trademark. All other trademarks are the property of their respective owners. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use.